

Fig. 1

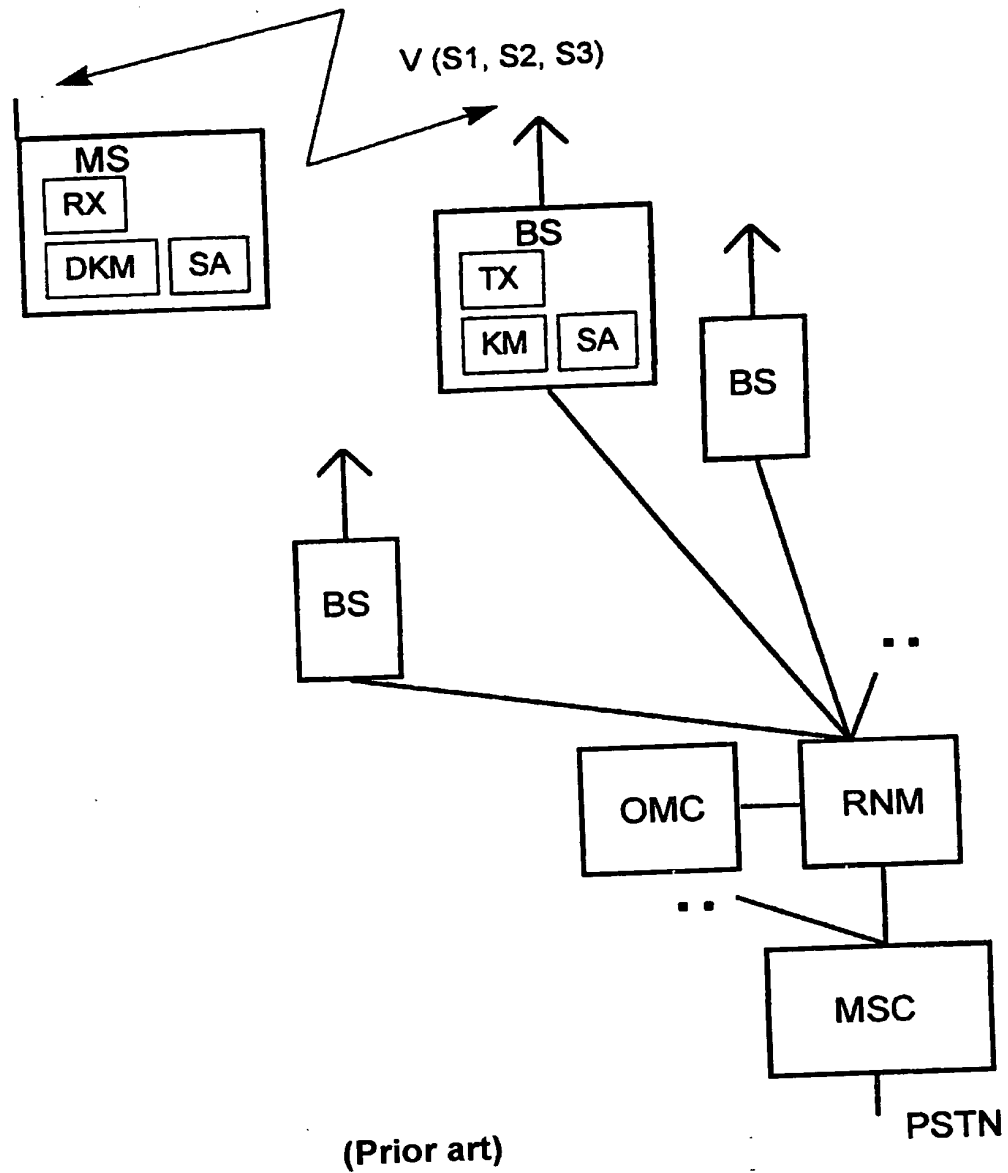


Fig. 2

	Maximum gross data rate	Minimum gross data rate	Dynamic range	Block size	Coding
Service S1 (d1)	200 kbps	40 kbps	only two possible rates	400 bits	absolute with one bit
Service S2 (d2)	1200 kbps	0 kbps	high	600 bits	relative
Service S3 (d3)	80 kbps	80 kbps	constant data rate	800 bits	not required

Fig. 3


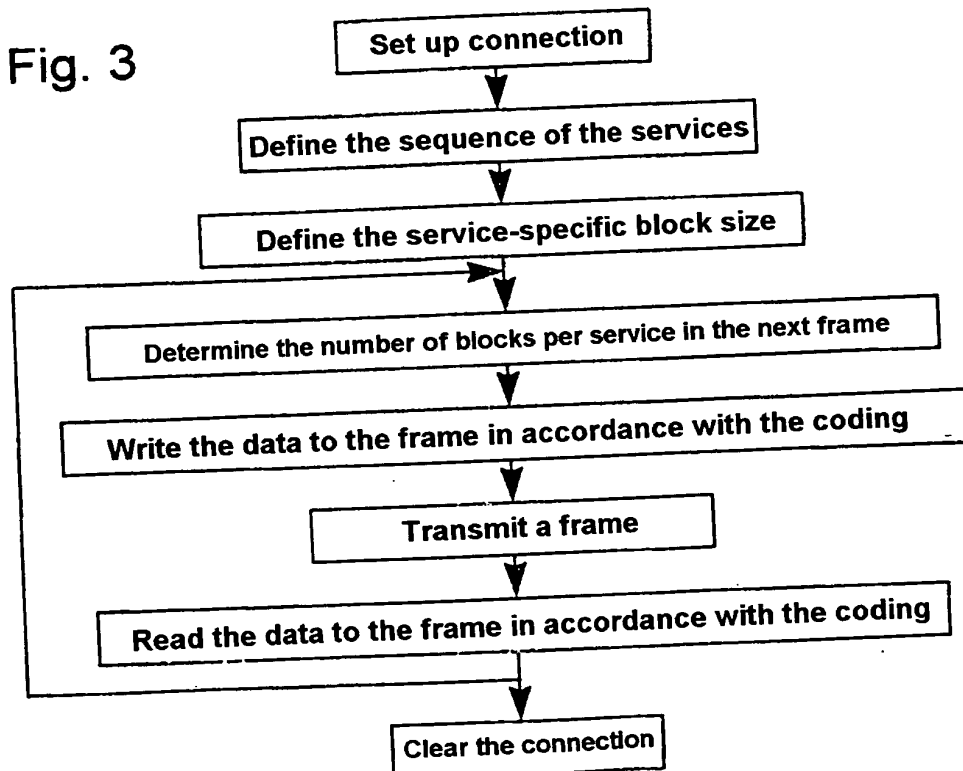


Fig. 4

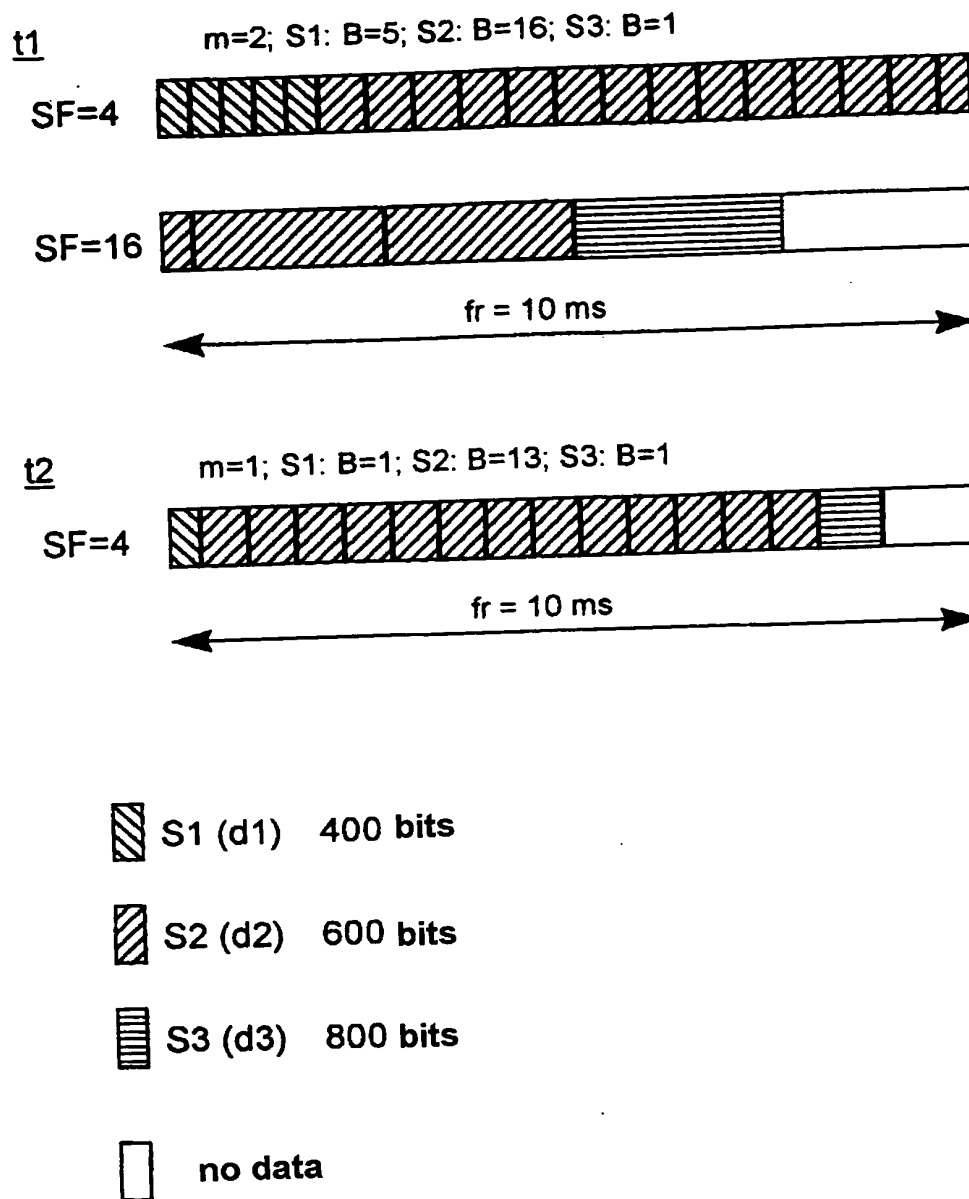

T06T90-12150660